

$\boldsymbol{D}\,\boldsymbol{I}\,\boldsymbol{A}\,\boldsymbol{M}\,\boldsymbol{O}\,\boldsymbol{N}\,\boldsymbol{D}^{\,\circ}$

STRAIGHT FACE RETAINING WALL

A LIGHTWEIGHT SOLUTION FOR SEGMENTAL RETAINING WALLS WITH A WEATHERED STONE LOOK



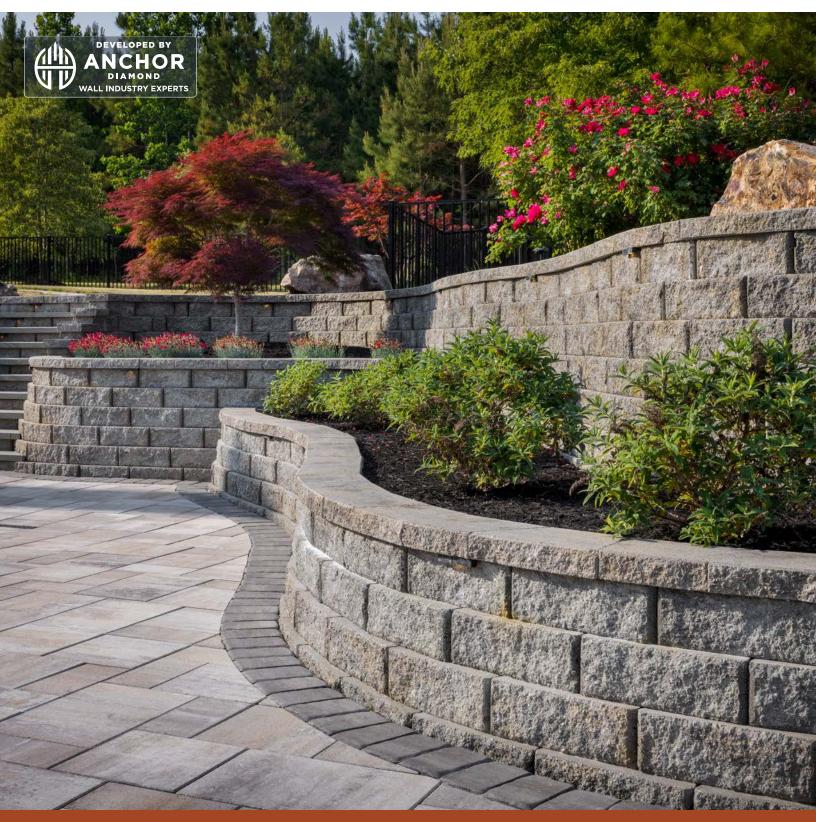

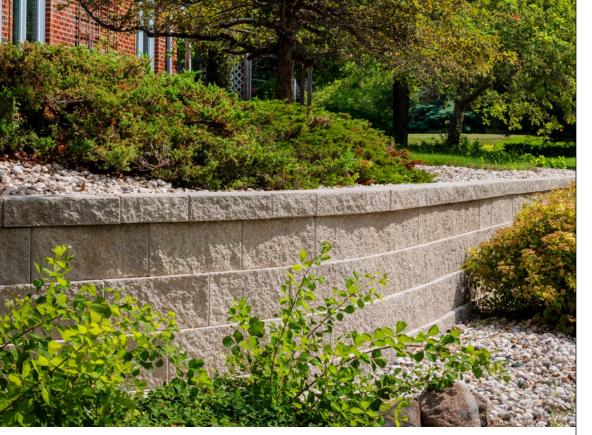

DIAMOND

STRAIGHT FACE RETAINING WALL

A LIGHTWEIGHT SOLUTION FOR SEGMENTAL RETAINING WALLS WITH A WEATHERED STONE LOOK

⊘ FEATURES & BENEFITS

- The original rear-lip block
- Gravity walls up to 4 feet 6 inches high, including buried course
- Taller walls can be built using geosynthetic reinforcement when designed by a qualified engineer
- Minimum outside radius, measured on the top course to the front of the units: 4 feet
- Minimum inside radius, measured on the base course to the front of the units: 8 feet
- Setback/System Batter: 1 1/8 inches/10.6 degrees

♦ MINNESOTA SERIES







COTSWOLD MIST DESERT TAN



GRAY

CHARCOAL

• IOWA SERIES









PLUM BROWN



STRAIGHT FACE



6 x 17¼ x 12

CAP



3 x 171/4 x 101/2

CORNER



6 x 16 x 8



GRAY

 TAN











