
## **STERLING**°

WALL SYSTEM








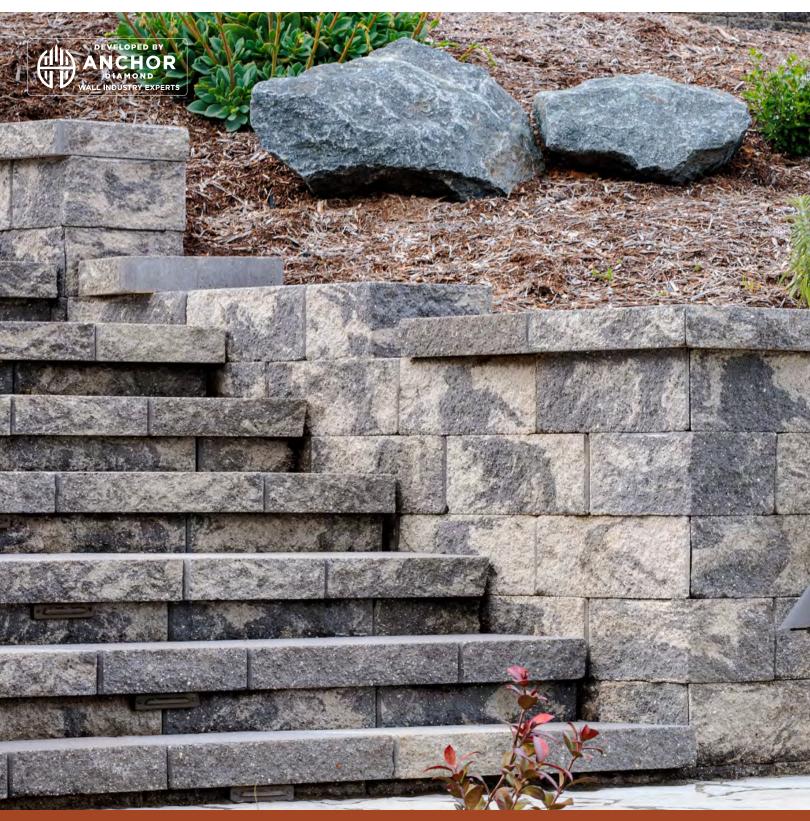

## **♦** AVAILABLE COLOURS







<sup>\*\*</sup> Only available in British Columbia



GREY



SILVERADO\*\*

## STERLING

WALL SYSTEM

A VERSATILE RETAINING OR FREESTANDING WALL SYSTEM THAT INSTALLS WITH AN EASY TO LOCATE PIN SYSTEM

## **⊘** FEATURES & BENEFITS

- Build walls with easy pin alignment couple with side view placement visualization
- Ideal for battered and freestanding wall applications
- Visible score marks for easy splitting in the construction of walls, columns and corners
- 2 sided wall allows for seating wall, parapet, raised patios and posts
- · Corners perfectly match block height
- 6" step riser easy to calculate and meets egress building code requirements
- Cap overhang adapts for wall lighting installation
- Can be used with Tandem and Melville caps
- · Only two product SKUs
- Hand holds allow for easier handling during installation
- Gravity Retaining Wall Height Max 4'\*
- Freestanding Wall Height Max 3'\*
- Column Height Max 4'\*
- Retaining Wall Minimum Inside Radius 6' (Measured on the base course to the front of the units)
- Retaining Wall Minimum Outside Radius (Measured on the base course to the front of the units)
- Freestanding wall minimum radius 4 ft
- One box of 100 pins with each pallet of SRW units

\*Gravity wall heights are based on project specific conditions and may be lower than this value.



I-I STERLING°			SQFT/ PALLET	SQFT/ LAYER	LAYER/ PALLET	UNITS/ PALLET	UNITS/ LAYER	UNITS/ SQFT	WEIGHT/ UNIT	WEIGHT/ PALLET	PINS
SRW	150	6 x 17¾ x 12 in 150 x 450 x 300 mm	33.2	6.65	5	45	9	1.35	75 LB 34 KG	3375 LB 1530 KG	100 pins/pallet
CAP	AND ESTABLES	3 x 18 / 12 x 13 in 76 x 457 / 300 x 330 mm	90 LF	2.82	8	72	9	1.25 LF	54.69 LB 24.8 KG	3938 LB 1786 KG	N/A

\*SRW pallet includes 100 pins











